


1 FUNKTIONER

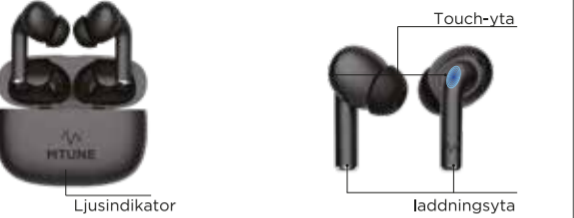

2 ANVÄNDNING

1 LADDA HÖRLURSBOKEN

- Sätt i en USB C kabel i hörlursboxen (medföljer)
- Sätt andra änden i en USB väggaddare.
- Ljusindikator tänds för att visa att den laddar
- När den är fulladdad så lyser alla fyra lampor i 30 sekunder för att sedan släckas.

2 TRÅDLÖST LADDNING



NO.	Spec	BESKRIVNING
1	Laddningsström	Max till 155mAh
2	Tid till full laddning	ca 160min
3	Arbetstemperatur	-20 grader upp till 50grader
4	Effekt trådlösladdning	5V
5	Strömförsörjning	5V=0.15 0.75W
6	Temperatur kontroll	Automatiskt avstängning vid 55 grader

3 LADDA HÖRLURARNA

- Lägg hörlurarna i hörlursboxen så laddas hörlurarna automatiskt.
- Hörlurarna stängs av automatiskt om anslutningen bryts mellan enheten.
- Första ledindikator från vänster blinkar långsamt när den vänstra hörluren laddas.
- Första ledindikator från höger blinkar långsamt när den högre hörluren laddas.

4 STARTA OCH PARA

Öppna locket på hörlursboxen och båda hörlurarna går på automatiskt. När ljudet "dong" hörs betyder det att hörlurarna lyckats para ihop sig med din enhet.

IOS/Android:

Sätt på Bluetooth på enheten och tryck därefter på **MTUNE P1** för att para ihop hörlurarna med er enhet.



Hörlurarna låter "dong" när Bluetooth signalen är av eller stängs ned. Hörlurarna går i viloläge efter 3 min om inget ljud spelas upp.

5 VÄXLING MELLAN BÅDA HÖRLURARNA

Du har möjligheten att använda en eller båda hörlurarna samtidigt.

6 STÄNG AV

- Ta av dig hörlurarna och lägg de i hörlursboxen så stängs de av automatiskt.
- Hörlurarna stängs av automatiskt om anslutningen bryts mellan enheten.
- Tryck och håll på touchknappen i 12 sekunder på hörlurarna så stängs de av. * Man kan se via telefonen hur mycket batteri som finns kvar i hörlurarna samt att det låter "du,du" när det är dags att ladda hörlurarna.

7 TELEFON & MUSIK

- Svara samtal - Tryck en gång snabbt på en av hörlurarna
- Avsluta samtal - Tryck en gång snabbt på en av hörlurarna
- Anvisa ett samtal - Tryck en gång och håll i minst 1s på en av hörlurarna
- Spela upp/Pausa musik - Tryck en gång snabbt på en av hörlurarna
- Spela upp nästa/föregående låt -
- Dubbeltryck på högra hörluren för nästa låt och vänstra för föregående låt.
- Höja/sänka volymen -
- Tryck 3 gånger på högra hörluren för att höja ljudet
- Tryck 3 gånger på vänstra för att sänka ljudet.

8 RÖSTASSISTENT

Tryck på den vänstra hörluren i 3 sekunder tills en ton "di" ljuder för att aktivera Siri eller röstassistenten.

9 ANC LÄGE

Tryck på den högra hörluren i 2 sekunder tills en ton "di" ljuder för att ändra ANC lägen.

10 FABRIKSÅTERSTÄLLNING

Lägg tillbaka hörlurarna i hörlursboxen och tryck samt håll i minst 5 sekunder på båda hörlurarna för att fabriksåterställa Mtune P1. Ena hörluren blinkar rött två gånger.

3 SNABBTONER

TON	BESKRIVNING
Stänger av	Snabbton "du"
Ansluta till en enhet	Snabbton "dong"

4

NO.	Spec	Beskrivning
1	Batterikapacitet	360 mAh
2	Laddning	USB Type C
3	Input	5V 1A
4	Full laddning med kabel	C.a 1,5 timme
5	Antal laddningar för hörlurarna	3 till 4 gånger
6	Vänstra hörluren i hörlursboxen	Ledindikatorn första vänstra ljus blinkar
7	Högra hörluren i hörlursboxen	Ledindikatorn första högra ljus blinkar
8	Hörlursboxen laddar	När batteriet är >25% så lyser den första vänstra lamporna och den andra blinkar. När batteriet är >50% så lyser de två första vänstra lamporna och den tredje blinkar När batteriet är >75% så lyser de tre första vänstra lamporna och den fjärde blinkar När batteriet är 100% så lyser alla lampor i ett fast sken.
9	Hörlursboxen fulladdad	Alla fyra ljusen lyser i ett fast sken i 30s för att sedan stängas av helt.
10	Lågt batteri	Första ledindikatorlampa blinkar 5 gånger i minuten då hörlursboxen har under 20% i ström
11	Under 3,2V	Hörlursboxen stängs av

5 SPECIFIKATION HÖRLURAR

NO.	Spec	Beskrivning
1	Frekvens	20HZ-20KHZ
2	Impedans	16 Ω
3	Kapacitet	45mAh
4	Känslighet	113±3dB
5	Storlek hörlur	33.2*19.6*23.6mm
6	Storlek hörlursbox	62*22.8*46.3mm
7	Vikt hörlur	4.0g
8	Bluetooth räckvidd	Upp till 15m
9	Bluetooth version	V 5.2
10	Högtalare	13mm
11	Överföringsfrekvens	2.4GHZ-2.48GHZ
12	Laddningstid hörlurar	60 minuter
13	Speltid	Taltid ca 6.5timmar, Musik upp till 8 timmar, Standby 520 dagar
14	Arbetstemperatur	Minus 20 grader upp till 50 grader

6 SÄKERHETSÅTGÄRDER

Vänligen läs och följ dessa instruktioner:

- Förvara och använd inte produkten i extrem hetta eller våta utrymmen
- Speltiden är olika beroende på hur man använder produkten
- Beakta alla varningar på produkten och i bruksanvisningen
- Lyssna inte på för hög volym i långa perioder för att undvika permanenta hörselskador
- Använd inte produkten om den orsakar obehag eller smärta


7 PRODUKTENS INNEHÅLL

- Bluetooth hörlurar 2st
- Hörlursbox 1st
- USB C kabel 1st
- Manual 1st
- Öronkåpor 3 storlekar 6st

MTUNE

TRUE WIRELESS PODS USER MANUAL

1 FUNCTIONAL DIAGRAM

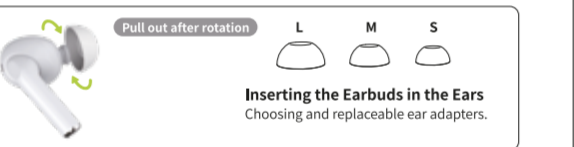

2 HOW TO USE

1 TO CHARGE CHARGING CASE

- Connect Type-C cable to charge for the charging case
- Plug the USB connector of the cable into a USB Power source
- The indicator light will display while the charging case is charging
- All 4 lights keep on for 30 seconds and then off when the charging case is fully charged

2 WIRELESS CHARGING



Position on charging pad



Put the charging case (wireless charging area in blue circle) on the center of charging pad

NO.	Item	Description
1	Wireless charging current	Max to 155mA
2	Full wireless charging time	about 160 min
3	Working temperature	-20°C-50°C
4	Wireless charging Input	5V
5	Power	5V=0.15 0.75W
6	Temperature control	Automatically off charging at about 55°C

*Please use Qi standard charging pad

3 TO CHARGE EARPHONES

- Put the earphone in the charging case correctly, and it will charge for Earphones automatically
- The first left light flashes slowly when left earphone is charging
- The first right light flashes slowly when right earphone is charging

4 POWER ON AND PAIRING

- Open the cover of charging case, both earphones will AUTO-ON and AUTO-PAIRING, both earphones will response with a voice prompt: "Dong" when connected with mobile phone successfully.

IOS/Android:

Enable the bluetooth pairing mode on your phone device. Tap on " **MTUNE P1** " to connect. And both earphones will response with a voice prompt: "Dong" when connected with mobile phone successfully.



- Earphones will response with a voice prompt: "Dong" when bluetooth signal is cut off, and shutdown 3 mins later automatically.

5 SEAMLESS SWITCHING BETWEEN EITHER EARBUDS

You have the freedom to wear one or both earbuds, and you are allowed to seamless switching between either earbuds at your disposal.

*Take out either earphone form charging case, it will AUTO connect within 20ms.

6 POWER OFF

- Put the earphones in the charging case correctly, and close the cover, earphones will AUTO-OFF.
- Earphone will shutdown automatically in 3mins after disconnected with devices.
- Touch either earphone for 12s to shutdown manually.

*The battery status of earphones is visible on connected devices when it's running out of power, the earphones will remind you with a voice prompt: "DU,DU",pls recharging in time.

7 PHONE & MUSIC

- To Answer a call
Touch either earphone one short
- To End a call
Touch either earphone one short
- To Reject a call
Touch either earphone for 1 second
- To Play and pause music
Touch either earphone one short
- To Play Prev/Next Song
Double touch left earphone for previous song
Double touch right earphone for next song
- Increase / decrease the volume
Press the right earphone 3 times to increase the volume
Press the left earphone 3 times to decrease the volume.

8 VOICE ASSISTANT

Press left earphone about 3 seconds after hearing a prompt tone "di" and release to activate Siri or voice assistant.

9 ANC MODE

Touch and hold the right earphone for 2 seconds and release after hearing a prompt tone "DI".

10 RESTORE FACTORY DEFAULTS

Put the earphones into the charging case, and hold and press either earphone for 5 seconds to restore factory resetting (Main earphone flashes red twice).

3 PROMPT TONE

Prompt item	Prompt tone description
Turn off	Prompt tone "du"
Connect the mobilephone	Prompt tone "dong"

4 CHARGING CASE SPECIFICATION

NO.	Item	Description
1	Battery capacity	360 mAh
2	Charging way	Type-C
3	Input	5V 1A
4	Full charging time with cable	About 1.5H
5	Recharging times for earphones	3 to 4 times
6	Left earphone in the case	The first left light flashes slowly
7	Right earphone in the case	The first right light flashes slowly
8	Charging case is charging	When battery is >25%, the first left light keeps on and next one flashes When battery is >50%,the left two lights keep on and next one flashes When battery is >75%,the left three lights keep on and next one flashes When battery is 100%, all lights keeps on
9	Charging case is fully charged	All 4 lights keep on for 30 seconds and then off
10	Low power(3.2-3.3V)	The first left light flashes 5 times once a minute when charging case battery is < 20%
11	<3.2V	Power off

5 EARPHONE SPECIFICATIONS

NO.	Item	Specification
1	Frequency response range	20HZ-20KHZ
2	Product impedance	16 Ω
3	Capacity	45mAh
4	Sensitivity	113±3dB
5	Earphone Size	33.2*19.6*23.6mm
6	Charging case Size	62*22.8*46.3mm
7	Earphone Weight	4.0g
8	Bluetooth operation distance	Up to 15 meters
9	Bluetooth version	V 5.2
10	Speaker	13 mm
11	Transmission frequency	2.4GHZ-2.48GHZ
12	Charging time	60 minutes (earphone)
13	Life time	Playtime - Talktime about 6,5 hours, Music up to 8 hours, Standby about 520 days
14	Product working temperature	-20°C- 50°C

6 SAFETY PRECAUTIONS

- Please read follow and keep these instructions:
- Keep the device out of extreme heat and humid
 - Power time may different depending on personal habits
 - Heed all warnings on the product and in the operation instructions
 - Do not listen at high volume level for long period to protect hearing
 - Stop using this product immediately if it causes discomfort or pain

7 INSIDE THE BOX

- Bluetooth Headset X 2PCS
- Charging Case X1PCS
- USB Type C Cable x 1PCS
- User Manual X1PCS
- Silicon ear tips three sizes 6pcs